security supplies

PRICE LIST

IP | HDCVI | Mobile | Door Entry
Display & Control | Accessories | Equipment

About us

Security Supplies offer an extensive range of security products from the industry's leading manufacturers of Intruder, CCTV, Access Control & Fire equipment.

As an established supplier of over 23 years, we can provide you with expert technical support, system design & impartial advice on the many brands available.

Opening hours 8am to 5pm Monday - Friday Free Local Delivery / Overnight Courier Service / Worldwide Exports / Credit Account Facility / Credit Card Facility.

With Branches in Chelmsford, St Albans, Poole & Fareham we can offer a same day delivery service locally to the branches or by next day courier to those further afield.

Our Branches

Fareham branch
Unit 5, Fulcrum 4
Solent Way, Whiteley
Fareham, Hampshire PO15 7FT
Tel: 01489 563400

Poole branch
Unit 21, Wessex Trade Centre Ringwood Road, Poole
Dorset
BH12 3PF
Tel: 01202 745444

St. Albans branch
Unit 8, Park Industrial Estate
St. Albans,
Hertfordshire
AL2 2DR
Tel: 01727 614441

Chelmsford branch
Unit 224, Waterhouse Business Centre 2
Cromar Way, Chelmsford,
Essex
CM1 2QE
Tel: 01245 860184

Contents

4-13 HDCVI Cameras

14-20 Hybrid Video Recorders

22-45 IP Cameras

47-52 Network Video Recorders

53-55 Camera Mounting Accessories

57-60 Monitors

61-62 Network Switches

63-66 PTZ Cameras

Dahua Naming Rule

HDCVI Cameras

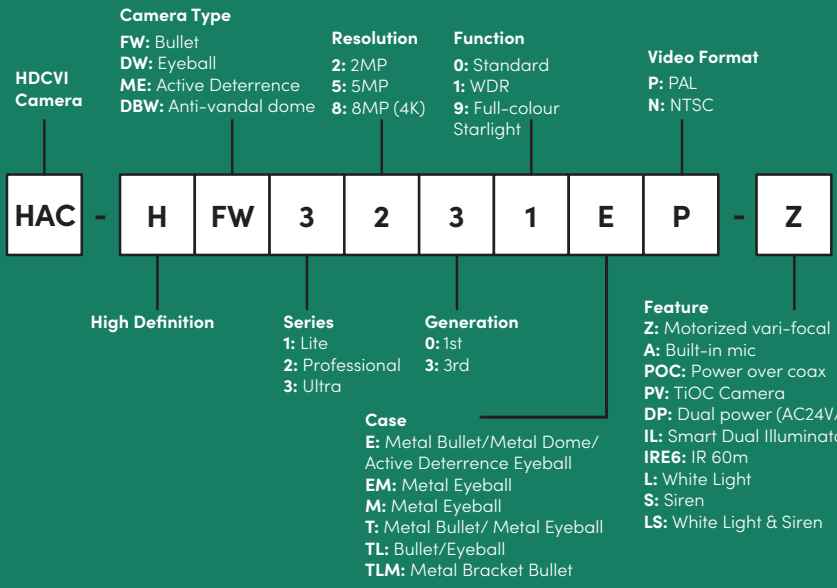

5MP Starlight HDCVI IR Eyeball Camera
HAC-HDW2501TP-Z-A-27135-S2

Max 25fps@5 megapixel (16:9 video output),Starlight, 120 dB true WDR, 3D NR, CVI/CVBS/AHD/TVI switchable, Built-in Mic, 2.7–13.5mm motorized lens, Max. IR length 60m, Smart IR, IP67, DC12V.

5 Megapixel

5MP HDCVI IR Bullet Camera
HAC-HFW1500RP-Z-IRE6-A-2712-S2

Max 25fps@5 megapixel (16:9 video output), CVI/CVBS/AHD/TVI switchable, 2.7-12mm motorized lens, Built-in Mic (-A), Max. IR length 60m, Smart IR, IP67, DC12V.

5 Megapixel

5MP Starlight HDCVI IR Dome Camera
HAC-HDBW2501EP-0280B-S2

Max 25fps@5 megapixel (16:9 video output), Starlight, 120 dB true WDR, 3D NR, CVI/CVBS/AHD/TVI switchable, 2.8mm fixed lens, Max. IR length 30m, Smart IR, IP67, IK10, DC12V.

5 Megapixel

5MP Starlight HDCVI IR Eyeball Camera
HAC-HDW2501TMQP-A-0280B-S2

Max 25fps@5 megapixel (16:9 video output), Starlight, 120 dB true WDR, 3D NR, CVI/CVBS/AHD/TVI switchable, Quick-to-install eyeball saves installation time, 2.8mm fixed lens, Built-in Mic, Max. IR length 60m, Smart IR, IP67, DC12V.

5 Megapixel

4K Real-time HDCVI IR Eyeball Camera
HAC-HDW1800TLP-A-0280B

Max. 4K resolution, real-time video transmission, CVI/CVBS/AHD/TVI switchable, Built-in Mic (-A), Fixed lens 2.8mm, Max. IR length 30m, Smart IR, IP67, DC12V.

8 Megapixel

5MP Starlight HDCVI IR Dome Camera
HAC-HDBW2501R-Z

Max. 25fps@5 megapixel (16:9 video output), Starlight, 120 dB true WDR, 3D NR, CVI/CVBS/AHD/TVI switchable, 2.7–13.5mm motorized lens, Max. IR length 30m, Smart IR, IP67, IK10, DC12V.

5 Megapixel

5MP Starlight HDCVI IR Bullet Camera
HAC-HFW2501TUP-Z-A-27135-S2

Starlight, 120dB true WDR, 3DNR, Max. 20fps@5 megapixel, HD/SD output switchable, Audio in interface, Built-in Mic, 2.7-13.5mm motorized lens, Max. IR length 80m, Smart IR, IP67, DC12V.

5 Megapixel

5MP HDCVI IR Dome Camera
HAC-HDBW1500EP-0280B-S2

Max. 20fps@5 megapixel, HD/SD output switchable, 2.8mm fixed lens, Max. IR length 30m, Smart IR, IP67, IK10, DC12V.

5 Megapixel

5MP Starlight HDCVI IR Bullet Camera
HAC-HFW1500RP-Z-IRE6-A-POC-2712-S2

Max 25fps@5 megapixel (16:9 video output), CVI/CVBS/AHD/TVI switchable, 2.7-12mm motorized lens, Built-in Mic, Max. IR length 60m, Smart IR, IP67, DC12V.

5 Megapixel

5MP HDCVI Full-Color Active Deterrence Fixed Eyeball Camera
HAC-ME1509HP-A-PV-0360B

24/7 color imaging, Active deterrence with red & blue light, siren and alarm out interface, Max. 20fps@5 megapixel, 3.6mm fixed lens, 40m illumination distance, IP67, DC12V.

5 Megapixel

2MP HDCVI IR Eyeball Camera
HAC-HDW1200TP-Z-A-2712-S5

Max 30fps@1080P, HD/SD output switchable, 2.7-12mm motorized lens, Max. IR length 60m, Smart IR, IP67, DC12V.

2 Megapixel

5MP Starlight HDCVI IR Eyeball Camera
HAC-HDW1500T-Z-A-S2

5 megapixel, Max 25fps@5 megapixel (16:9 video output), CVI/ CVBS/AHD/TVI switchable, 2.7-12mm motorized lens, Built-in Mic(-A), Max. IR length 60m, Smart IR, IP67, DC12V.

5 Megapixel

2MP HDCVI IR Eyeball Camera
HAC-HDW1200EMP-A-0280B-S5

Max 30fps@1080P, CVI/CVBS/AHD/TVI, switchable, 2.8mm fixed lens, Built-in Mic(-A), Max. IR length 50m, Smart IR, IP67, DC12V.

2 Megapixel

2MP Starlight HDCVI IR Dome Camera
HAC-HDBW3231EP-Z-2712

Starlight, 120dB true WDR, 3DNR, Max 30fps@1080P, HD/SD dual-output, 2.7-12mm motorized lens, Max. IR length 50m, Smart IR, IP67, IK10, AC24V/DC12V.

2 Megapixel

2MP Starlight HDCVI IR Bullet Camera
HAC-HFW3231EP-Z

Starlight, 120dB true WDR, 3DNR, Max, 30fps@1080P, HD/SD dual-output, 2.7-12mm motorized lens, Max. IR length 100m, Smart IR, 1/1 Alarm in/out, 1 audio in, IP67, IK10, AC24V/DC12V.

2 Megapixel

2MP HDCVI IR Eyeball Camera
HDW1200EM-A-0280-S5-G

Max 30fps@1080P, CVI/CVBS/AHD/TVI, switchable, 2.8mm fixed lens, Built-in Mic(-A), Max. IR length 50m, Smart IR, IP67, DC12V.

2 Megapixel

5MP Starlight HDCVI IR Eyeball Camera
HAC-HDW1500TM-A-POC-0280-S2

Max 25fps@5 megapixel (16:9 video output), Starlight, DWDR, 2D NR, CVI/CVBS/AHD/TVI, switchable, 2.8mm fixed lens, Built-in Mic, Max. IR length 60m, Smart IR, IP67, PoC (only CVI)/DC12V.

5 Megapixel

2MP HDCVI IR Eyeball Camera
HAC-HDW1200T-Z-A-S5-G

Max 30fps@1080P, HD/SD output switchable, Built-in Mic, 2.7-12mm motorized lens, Max. IR, length 60m, Smart IR, IP67, DC12V.

2 Megapixel

5MP Full-color HDCVI Eyeball Camera
HAC-HDW1509T-A-LED-0280-S2-G

Max 25fps@5 megapixel (16:9 video output), 120 dB true WDR, 3D NR, 24/7 color imaging, 40m illumination distance, CVI/CVBS/AHD/TVI switchable, Built-in Mic, 2.8mm fixed lens, IP67, DC12V.

5 Megapixel

5MP Full-Color HDCVI PoC Eyeball Camera
HAC-HDW1509T-A-LED-POC-0280-S2

Max 25fps@5 megapixel (16:9 video output) 120 dB true WDR, 3D NR, 24/7 color imaging, 40m illumination distance, CVI/CVBS/AHD/ TVI switchable, Built-in Mic, 2.8mm fixed lens, IP67, PoC (only CVI)/DC12V.

5 Megapixel

5MP Starlight HDCVI IR Eyeball Camera
HAC-HDW1500TLMQP-A-0280B-S2

Max 25fps@5 megapixel (16:9 video output), CVI/CVBS/ AHD/TVI switchable, 2.8mm fixed lens, Built-in Mic, Max. IR length 30m, Smart IR, IP67, DC12V.

5 Megapixel

2MP Full-color HDCVI Eyeball Camera
HAC-HDW1239TP-A-LED-0280B-S2

24/7 color imaging, Max. 30fps@1080p 40m illumination distance, Super Adapt, 130 dB true WDR, 3D NR, Built-in mic (-A), 2.8mm fixed lens, CVI/CVBS/ AHD/TVI switchable, IP67, DC12V.

2 Megapixel

2MP Full-color HDCVI Eyeball Camera
HAC-HDW1239TP-A-LED-0360B-S2

24/7 color imaging, Max 30fps@1080p, 40m illumination distance, Super Adapt, 130 dB true WDR, 3D NR, Built-in Mic (-A), 3.6mm fixed lens, CVI/CVBS/AHD/TVI switchable, IP67, DC12V.

2 Megapixel

2MP Starlight HDCVI IR Dome Camera
HAC-HDBW2241FP-A-0280B-S2-DIP

Starlight, 120dB true WDR, 3DNR, Max. 30fps@1080P, HD/SD output switchable, Audio in interface, Built-in Mic, 2.8mm fixed lens, Max. IR length 20m, Smart IR, IP67, IK10, DC12V.

2 Megapixel

5MP Full-color HDCVI Eyeball Camera
HAC-HDW1509TP-A-LED-0360B-S2

Max 25fps@5 megapixel (16:9 video output), 120 dB true WDR, 3D NR, 24/7 color imaging, 40m illumination distance, CVI/CVBS/AHD/TVI switchable, Built-in Mic (-A), 3.6mm fixed lens, IP67, DC12V.

5 Megapixel

5MP Full-color HDCVI Eyeball Camera
HAC-HDW1509TP-A-LED-0280B-S2

Max 25fps@5 megapixel (16:9 video output), 120 dB true WDR, 3D NR, 24/7 color imaging, 40m illumination distance, CVI/CVBS/AHD/TVI switchable, Built-in Mic (-A), 2.8mm fixed lens, IP67, DC12V.

5 Megapixel

5MP Full-Color HDCVI PoC Eyeball Camera
HAC-HDW1509TP-A-LED-POC-0280B-S2

Max 25fps@5 megapixel (16:9 video output), 120 dB true WDR, 3D NR, 24/7 color imaging, 40m illumination distance, CVI/CVBS/AHD/TVI switchable, Built-in Mic, 2.8mm fixed lens, IP67, PoC (only CVI)/ DC12V.

5 Megapixel

2MP HDCVI IR Eyeball Camera
HAC-HDW1200EMP-A-0360B-S5

Max 30fps@1080P, CVI/CVBS/AHD/TVI switchable, 3.6mm fixed lens, Built-in Mic(-A), Max. IR length 50m, Smart IR, IP67, DC12V.

2 Megapixel

2MP HDCVI IR Dome Camera
HAC-HDBW1200EP-0360B-S5

HD/SD output switchable, 3.6mm fixed lens, Max. IR length 30m, Smart IR, IP67, IK10, DC12V.

2 Megapixel

2MP HDCVI IR Eyeball Camera
HAC-HDW1200MP-0280B-S5

Max 30fps@1080P, HD/SD output switchable, 2.8mm fixed lens, Max. IR length 30m, Smart IR, IP67, DC12V.

2 Megapixel

5MP HDCVI Full-Color Active Deterrence Fixed Eyeball Camera
HAC-ME1509HP-A-PV-0280B

24/7 color imaging, Active deterrence with red & blue light, siren and alarm out interface,Max. 20fps@5 megapixel, 2.8mm fixed lens,40m illumination distance, IP67, DC12V.

5 Megapixel

5MP HDCVI Full-Color Active Deterrence Fixed Bullet Camera
HAC-ME1509THP-A-PV-0360B

24/7 color imaging, Active deterrence with red & blue light, Built-in Mic, Max. 20fps@5 megapixel, 3.6mm fixed lens, 40m illumination distance,IP67, DC12V.

5 Megapixel

HYBRID VIDEO RECORDERS (XVR)

Dahua Naming Rule

Hybrid Video Recorders (XVR)

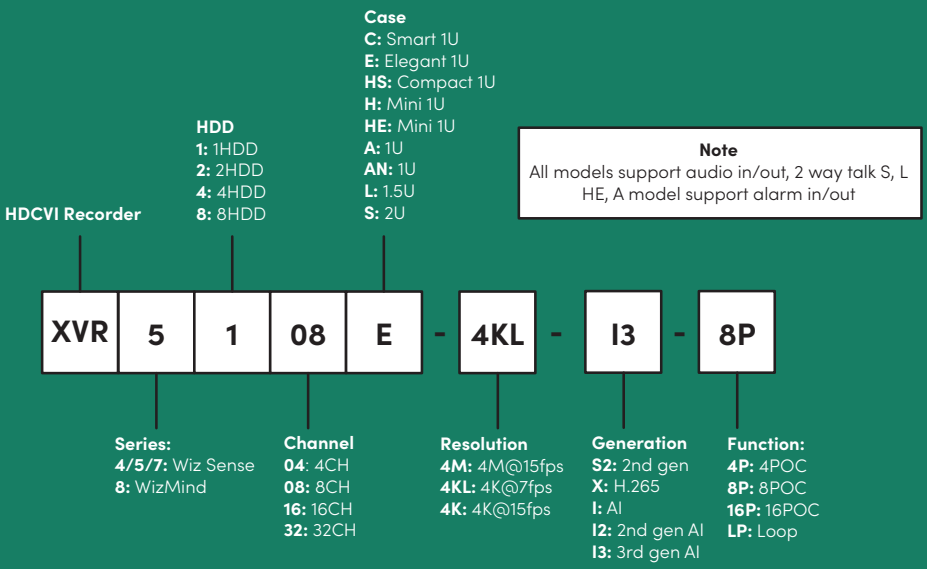

32 Channel Penta-brid 5M-N/1080P 1U 2HDDs WizSense DVR

DH-XVR5232AN-I3

H.265+/H.265 dual-stream video compression, Supports 16 channel AI-Coding, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 32 Channel IP camera inputs, each channel up to 6 megapixels, Max 128 Mbps incoming bandwidth, Up to 4 Channel video stream (analogue channel), Perimeter Protection, Up to 16 Channel video stream (analogue channel) SMD Plus, Up to 2 Channel video stream (analog channel) human face recognition, IoT & PoS functionalities.

DH-XVR5232AN-I3	0TB
XVR5232AN-I3-4TB	4TB
XVR5232AN-I3-8TB	8TB
XVR5232AN-I3-10TB	10TB
XVR5232AN-I3-12TB	12TB
XVR5232AN-I3-16TB	16TB
XVR5232AN-I3-24TB	24TB

32 Channel

16 Channel Penta-brid 5M-N/1080P 1U 2HDDs WizSense DVR

DH-XVR5216A-I3

H.265+/H.265 dual-stream video compression, Supports Full channel AI Coding, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 24 Channel IP camera inputs, each channel up to 6 megapixel, Max 128 Mbps incoming bandwidth, Up to 4 Channel video stream (analogue channel), Perimeter Protection, Up to 16 Channel video stream (analogue channel) SMD Plus, Up to 2 Channel video stream (analogue channel) human face recognition, IoT & PoS functionalities.

XVR5216A-I3	0TB
XVR5216A-I3-1TB	1TB
XVR5216A-I3-2TB	2TB
XVR5216A-I3-3TB	3TB
XVR5216A-I3-4TB	4TB
XVR5216A-I3-6TB	6TB
XVR5216A-I3-8TB	8TB
XVR5216A-I3-10TB	10TB
XVR5216A-I3-12TB	12TB
XVR5216A-I3-16TB	16TB

16 Channel

32 Channel Penta-brid 4K-N/5MP 1U 2HDDs WizSense DVR
DH-XVR5232AN-4KL-I3

H.265+/H.265 dual-stream video compression, Supports 32 channel AI-Coding, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 32 Channel IP camera inputs, each channel up to 8 megapixel, Max 128 Mbps incoming bandwidth, Up to 12 Channel video stream (analogue channel), Perimeter protection, Up to 32 Channel video stream (analogue channel) SMD plus, Up to 6 Channel video stream (analogue channel) human face recognition, IoT & PoS functionalities.

DH-XVR5232AN-4KL-I3	0TB
XVR5232AN-4KL-I3-4TB	4TB
XVR5232AN-4KL-I3-6TB	6TB
XVR5232AN-4KL-I3-8TB	8TB
XVR5232AN-4KL-I3-10TB	10TB
XVR5232AN-4KL-I3-12TB	12TB
XVR5232AN-4KL-I3-16TB	16TB
XVR5232AN-4KL-I3-20TB	20TB

32 Channel

16 Channel Penta-brid 4K-N/5MP 1U 2HDDs WizSense DVR
DH-XVR5216AN-4KL-I3

H.265+/H.265 dual-stream video compression, Supports Full channel AI-Coding, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 32 Channel IP camera inputs, each channel up to 8 megapixel, Max 128 Mbps incoming bandwidth, Up to 8 Channel video stream (analog channel), Perimeter protection, Up to 16 Channel video stream (analog channel) SMD Plus, Up to 2 Channel video stream (analog channel) human face recognition, IoT & PoS functionalities.

DH-XVR5216AN-4KL-I3	0TB
XVR5216AN-4KL-I3-1TB	1TB
XVR5216AN-4KL-I3-2TB	2TB
XVR5216AN-4KL-I3-3TB	3TB
XVR5216AN-4KL-I3-4TB	4TB
XVR5216AN-4KL-I3-6TB	6TB
XVR5216AN-4KL-I3-8TB	8TB
XVR5216AN-4KL-I3-10TB	10TB
XVR5216AN-4KL-I3-12TB	12TB
XVR5216AN-4KL-I3-16TB	16TB

16 Channel

4 Channel Penta-brid 4K-N/5MP Compact 1U 1HDD WizSense DVR
DH-XVR5104HS-4KL-I3

H.265+/H.265 dual-stream video compression, Supports all Channel AI Coding, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 8 Channel IP camera inputs, each channel up to 8 megapixel, Max 64 Mbps incoming bandwidth, Up to 4 Channel video stream (analogue channel), Perimeter Protection, Up to 4 Channel video stream (analogue channel) SMD Plus, Up to 1 channel video stream (analogue channel) human face recognition, IoT & PoS functionalities.

DH-XVR5104HS-4KL-I3	0TB
XVR5104HS-4KL-I3-1TB	1TB
XVR5104HS-4KL-I3-2TB	2TB
XVR5104HS-4KL-I3-3TB	3TB
XVR5104HS-4KL-I3-4TB	4TB

4 Channel

8 Channel Penta-brid 4K Mini 1U 1HDD WizSense DVR
DH-XVR7108HE-4K-I3

H.265+/H.265 dual-stream video compression, Supports 8 channel AI-Coding, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 16 Channel IP camera inputs, each channel up to 8 megapixel, Max 128 Mbps incoming bandwidth, Up to 8 Channel video stream (analogue channel), Perimeter protection, Up to 8 Channel video stream (analogue channel) SMD plus, Up to 2 Channel video stream (analogue channel) human face recognition, IoT & PoS functionalities.

DH-XVR7108HE-4K-I3	0TB
XVR7108HE-4K-I3-1TB	1TB
XVR7108HE-4K-I3-4TB	4TB
XVR7108HE-4K-I3-6TB	6TB
XVR7108HE-4K-I3-8TB	8TB
XVR7108HE-4K-I3-10TB	10TB

8 Channel

8 Channel Penta-brid 4K-N/5MP Compact 1U 1HDD WizSense DVR
DH-XVR5108HS-4KL-I3

H.265+/H.265 dual-stream video compression, Supports Full channel AI Coding, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 16 Channel IP camera inputs, each channel up to 8 megapixel, Max 128 Mbps incoming bandwidth, Up to 8 Channel video stream (analogue channel), Perimeter protection, Up to 8 Channel video stream (analogue channel) SMD Plus, Up to 2 Channel video stream (analogue channel) human face recognition, IoT & PoS functionalities.

DH-XVR5108HS-4KL-I3	0TB
XVR5108HS-4KL-I3-1TB	1TB
XVR5108HS-4KL-I3-2TB	2TB
XVR5108HS-4KL-I3-3TB	3TB
XVR5108HS-4KL-I3-4TB	4TB
XVR5108HS-4KL-I3-6TB	6TB
XVR5108HS-4KL-I3-8TB	8TB

8 Channel

8 Channel Penta-brid 1080P Compact 1U Digital Video Recorder
DH-XVR5108HS-X

H.265+/H.265 dual-stream video compression, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 12/24 Channel IP camera inputs, each channel up to 6 megapixel, Max 48/96Mbps incoming bandwidth, Smart Search and Intelligent Video System.

DH-XVR5108HS-X	0TB
XVR5108HS-X-1TB	1TB
XVR5108HS-X-2TB	2TB
XVR5108HS-X-3TB	3TB
XVR5108HS-X-4TB	4TB
XVR5108HS-X-6TB	6TB
XVR5108HS-X-8TB	8TB
XVR5108HS-X-10TB	10TB

8 Channel

4 Channel Penta-brid 4K Mini 1U Digital Video Recorder
DH-XVR5104H-4KL-X-4P

H.265+/H.265 dual-stream video compression, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 6 Channel IP camera inputs, each channel up to 8 megapixel, Max 24Mbps Incoming Bandwidth, Smart Search and Intelligent Video System.

DH-XVR5104H-4KL-X-4P	0TB

4 Channel

8 Channel Penta-brid 5M-N/1080P Compact 1U 1HDD WizSense DVR
DH-XVR5108HS-I3

H.265+/H.265 dual-stream video compression, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 12 Channel IP camera inputs, each channel up to 6 megapixel, Max 64 Mbps incoming bandwidth, Up to 2 Channel video stream (analogue channel), Perimeter protection, Up to 8 Channel video stream (analogue channel) SMD Plus, Up to 1 Channel video stream (analogue channel) human face recognition, IoT & PoS functionalities.

DH-XVR5108HS-I3	0TB
XVR5108HS-I3-1TB	1TB
XVR5108HS-I3-2TB	2TB
XVR5108HS-I3-3TB	3TB
XVR5108HS-I3-4TB	4TB
XVR5108HS-I3-6TB	6TB
XVR5108HS-I3-8TB	8TB
XVR5108HS-I3-10TB	10TB

8 Channel

4 Channel Penta-brid 5M-N/1080P Compact 1U 1HDD WizSense DVR
DH-XVR5104HS-I3

H.265+/H.265 dual-stream video compression, Supports Full channel AI-Coding, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 6 Channel IP camera inputs, each channel up to 6 megapixel, Max 32 Mbps incoming bandwidth, Up to 2 Channel video stream (analogue channel), Perimeter protection, Up to 4 Channel video stream (analogue channel) SMD Plus, Up to 1 Channel video stream (analogue channel) human face recognition, IoT & PoS functionalities.

DH-XVR5104HS-I3	0TB
XVR5104HS-I3-1TB	1TB
XVR5104HS-I3-2TB	2TB
XVR5104HS-I3-3TB	3TB
XVR5104HS-I3-4TB	4TB
XVR5104HS-I3-6TB	6TB

4 Channel

8 Channel Penta-brid 1080P Smart 1U Digital Video Recorder
DH-XVR5108C-X

H.265+/H.265 dual-stream video compression, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 12 Channel IP camera inputs, each channel up to 6 megapixel, Max 48 Mbps incoming bandwidth, Smart Search and Intelligent Video System.

DH-XVR5108C-X	0TB
XVR5108C-X-1TB	1TB
XVR5108C-X-2TB	2TB
XVR5108C-X-3TB	3TB
XVR5108C-X-4TB	4TB
XVR5108C-X-6TB	6TB
XVR5108C-X-8TB	8TB
XVR5108C-X-10TB	10TB

8 Channel

SEAGATE

SKYHAWK
SURVEILLANCE

FOR VIGILANT
SURVEILLANCE

Dahua Naming Rule
IP Cameras

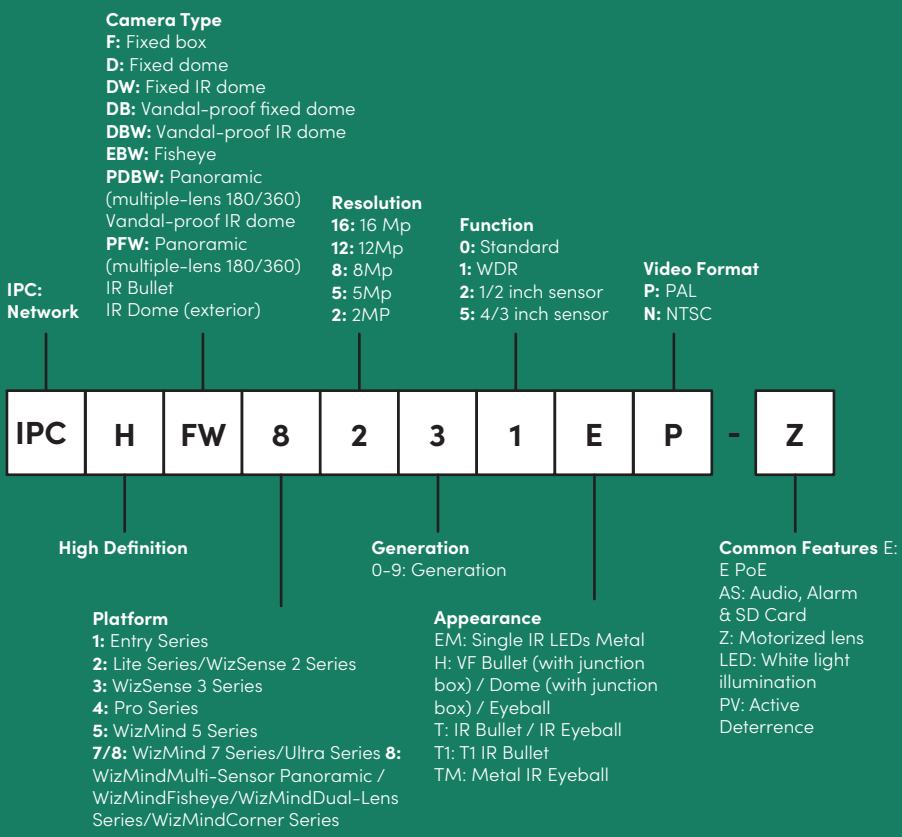

5MP TiOC Full-color Fixed Focal Eyeball Dome
IPC-HDW3549HP-AS-PV-0208B / 0360B-S4 (2.8mm or 3.6mm version)

5 megapixel, 1/2.7" CMOS, low illuminance, Outputs max 5 megapixel (2592 x 1944) @20 fps, & supports 4 megapixel (2688 x 1520) @25/30 fps, H.265 codec, max. illumination distance: 30m, Smart H.264+/H.265+, WDR.

5 Megapixel

5MP TiOC Full-color Fixed Focal Bullet
IPC-HDW3549T1P-AS-PV-0280B / 0306B - S4 (2.8mm or 3.6mm version)

5 megapixel, 1/2.7" CMOS, low illuminance, Outputs max. 5 megapixel (2592 x 1944) @20 fps, & supports 4 megapixel (2688 x 1520) @25/30 fps, H.265 codec, max. illumination distance: 40m, Smart H.264+/H.265+, WDR.

5 Megapixel

2MP Full-color Active Deterrence Eyeball WizSense Network Camera
IPC-HDW3249HP-AS-PV-0280B

2 megapixel, 1/2.8" CMOS, low illuminance, Outputs max. 2 megapixel (1920 x 1080) @30 fps Built-in illuminator, distance: 30m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (classification of vehicle & human), Alarm: 1 in, 1 out, audio: 1 in, 1 out, Built-in Mic & speaker, 12V DC/PoE, IP67, SMD Plus, Active Deterrent.

2 Megapixel

8MP IR Fixed Focal Dome WizSense Network Camera
IPC-HDBW3841EP-AS-0280B

8 megapixel, 1/2.8" CMOS, low illuminance, Outputs max. 8 megapixel (3840 x 2160) @20 fps (AI) & supports 8 megapixel (3840 x 2160) @25/30 fps (Non AI), IR distance: 30m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (classification of vehicle & human), Alarm: 1 in, 1 out, audio: 1 in, 1 out 12V DC/PoE, IP67, IK10, SMD Plus.

8 Megapixel

8MP IR Fixed Focal Bullet WizSense Network Camera
IPC-HFW3841EP-AS-0360B

8 megapixel, 1/2.8" CMOS, Outputs max. 8 megapixel (3840 x 2160) @20 fps (AI) & supports 8 megapixel (3840 x 2160) @25/30 fps (Non AI), H.265, IR range: 30m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (classification of vehicle & human), Alarm: 1 in, 1 out, audio: 1 in, 1 out, Built-in Mic, 12V DC/PoE, IP67, SMD Plus.

8 Megapixel

8MP IR Fixed Focal Eyeball WizSense Network Camera
IPC-HDW3841EMP-AS-0280B

8 megapixel, 1/2.8" CMOS, Outputs max. 8 megapixel (3840 x 2160) @20 fps (AI) 8 megapixel (3840 x 2160) @25/30 fps (Non AI) IR range: 30m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (classification of vehicle & human), Built-in Mic, 12V DC/PoE, IP67, SMD Plus.

8 Megapixel

5MP TiOC Full-color Fixed Focal Eyeball Dome
IPC-HDW3549HP-AS-PV-0280B-G

5 megapixel, 1/2.7" CMOS, low illuminance, Outputs max. 5 megapixel (2592 x 1944) @20 fps, & supports 4 megapixel (2688 x 1520) @25/30 fps, H.265 codec, max. illumination distance: 30m, Smart H.264+/H.265+, WDR.

5 Megapixel

5MP Entry IR Fixed Focal Eyeball Camera
IPC-HDW1530TP-0280B-S6

5 megapixel 1/2.7" CMOS, low luminance, Outputs max. 5 megapixel (2880 x 1620) @20 fps & supports 2688 x 1520 (2688 x 1520) @25/30 fps, H.265 codec, and the max. illumination distance is 30m, Smart H.264, +/H.265+, DWDRR.

5 Megapixel

8MP Entry IR Fixed Focal Eyeball Camera
IPC-HDW1830TP-0280B-S6

8 megapixel 1/2.7" CMOS, low luminance, Outputs max. 8 megapixel (3840 x 2160) @15 fps & supports 2688 x 1520 (2688 x 1520) @25/30 fps. Built-in IR LED, illumination distance is 30m, Smart, H.264 +/H.265+, DWDRR, 3D NR, HLC, BLC, Built-in Mic.

8 Megapixel

5MP Starlight/Lite AI IR (50M) Fixed Focal Turret Camera
IPC-HDW3541EMP-AS-0360B

5 megapixel, 1/2.7" CMOS, low illuminance, Outputs max. 5 megapixel (2592 x 1944) @20 fps, IR distance: 50m, Built-in Mic, DC12V/PoE power support, IP67.

5 Megapixel

5MP TIOC Full-color Active Deterrence Eyeball WizSense Network Camera
IPC-HDW3549HP-AS-PV-0280B-S3-B

5 megapixel, 1/2.7" CMOS, Outputs max. 5 megapixel (2592 x 1944) @20 fps, 4 megapixel (2688 x 1520) @25/30 fps, H.265, Max. illumination range: 30m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (classification of vehicle & human), Alarm: 1 in, 1 out, audio: 1 in, 1 out, Built-in Mic & speaker 12V DC/PoE, IP67, SMD Plus, Active Deterrence.

5 Megapixel

8MP TIOC Full-color Active Deterrence Eyeball WizSense Network Camera
IPC-HDW3849HP-AS-PV-0280B-S3-G

8 megapixel, 1/2.8" CMOS, Outputs max. 8 megapixel (3840 x 2160) @20 fps (AI) & 8 megapixel (3840 x 2160) @25/30 fps (Non AI), H.265. Illumination range: 30m, WDRR, 3D NR, HLC, BLC, Intrusion, tripwire (classification of vehicle & human) Alarm: 1 in, 1 out, audio: 1 in, 1 out, Built-in Mic & speaker, 12V DC/PoE, IP67, SMD Plus, Active Deterrence.

8 Megapixel

5MP IR Fixed Focal Bullet WizSense Network Camera
IPC-HFW3541EP-AS-0280B

5 megapixel, 1/2.7" CMOS, Outputs max. 5 megapixel (2592 x 1944) @20 fps, 4 megapixel (2688 x 1520) @25/30 fps, H.265, IR range: 50m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire, (classification of vehicle & human), Alarm: In, out, Audio: In, out, Built-in Mic, 12V DC/PoE, IP67, SMD Plus.

5 Megapixel

5MP Lite IR Fixed Focal Dome Network Camera
IPC-HDBW2531EP-S-0280B-S2/030B-S2 (2.8 or 3.6)

5 megapixel, 1/2.7" CMOS, low illuminance, Outputs max. 5 megapixel (2592 x 1944) @20 fps, & supports 2688 x 1520 (2688 x 1520) @25/30 fps H.265 codec, max IR distance: 30m, WDRR, 3D NR, HLC, BLC, Intrusion, tripwire, 12V DC/PoE, IP67, IK10.

5 Megapixel

8MP IR Bullet WizMind Network Camera
IPC-HFW5842H-ZHE-S2

8 megapixel, 1/1.8" CMOS Max outputs 8 megapixel (3840 x 2160) @25fps/30fps, Wide dynaMic, day/night, 3D NR, AWB, HLC, BLC, Alarm: 3 in, 2 out, audio: 1 in, 1 out, RS-485, BNC, 24V AC/12V DC/PoE, IP67, IK10, 12V DC power output, max. current 165mA.

8 Megapixel

5MP Lite AI IR Fixed Focal Eyeball Network Camera
IPC-HDW3541EMP-AS-0280B

5 megapixel, 1/2.7" CMOS, low illuminance, Outputs max. 5 megapixel (2592 x 1944) @20 fps, IR distance: 50m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (Recognition of vehicle and human), Built-in Mic, 12V DC/PoE power support, IP67, SMD.

5 Megapixel

12MP IR Fisheye WizMind Network Camera
IPC-EBW81242P-AS-S2

12 megapixel 1/1.7" CMOS, low luminance, Outputs max. 12m (4000 x 3000)@25 fps and the max. illumination distance is 10m, Intrusion, tripwire, heat map, & people counting, Alarm: 2 in, 2 out, audio: 1 in, 1 out, supports max, Built-in dual-array Mic and speaker, 12V DC/PoE, IP67 and IK10.

12 Megapixel

5MP Smart Dual Illumination Active Deterrence Vari-focal Bullet WizSense Network Camera
IPC-HFW3549T1P-ZAS-PV-27135

5 megapixel 1/2.7" CMOS image sensor, 5 megapixel (2960 x 1668) @20 fps, supports 4 megapixel (2688 x 1520) @25/30 fps, Built-in warm light and IR LED, Alarm: 1 in, 1 out; audio: 1 in, 1 out; built-in dual MICs; 1-ch speaker, 12 VDC/PoE power supply, IP67 protection, Sound and light alarm (red & blue lights), SMD 4.0, One-click arming/disarming through alarm input.

5 Megapixel

4MP WizMind Corner Network Camera
IPC-HCBW8442P-0250B

1/1.8" 4 megapixel progressive scan CMOS, 25/30 fps@2688 x 1520, WDRR (140 dB), Day/Night (ICR), 3D NR, AWB, AGC, BLC, 2.5mm fixed lens, distortion correction, 1/1 Alarm in/out, 1/1 audio in/out, Max. IR LEDs Length 10m, IP67 and IK10+ (50J) protection.

4 Megapixel

2MP Lite IR Fixed Focal Dome Network Camera IPC-**HDBW2231EP-S-0280B-S2**

2 megapixel, 1/2.8" CMOS, low illuminance, 2 megapixel (1920 x 1080) @ 25/30 fps max IR distance: 30m, WDRR, 3D NR, HLC, BLC, Intrusion, tripwire, Max. 256 GB Micro SD card, 12V DC/PoE, IP67, IK10.

2 Megapixel

5MP IR Vari-focal Dome WizSense Network Camera
IPC-HDBW3541RP-ZAS-27135

5 megapixel, 1/2.7" CMOS, low illuminance, Outputs max. 5 megapixel (2592 x 1944) @20 fps, & supports 4 megapixel (2688 x 1520) @25/30 fps IR distance: 40m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (classification of vehicle & human), Alarm: In, out, Audio: In, out, 12V DC/POE, IP67, IK10, SMD Plus.

5 Megapixel

5MP IR Fixed Focal Dome WizSense Network Camera
IPC-HDBW3541FP-AS-M-0280B

5 megapixel, 1/2.7" CMOS, low illuminance, Outputs max. 5 megapixel (2592 x 1944) @20 fps, & supports 4 megapixel (2688 x 1520) @25/30 fps IR distance: 30m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (classification of vehicle and human), Built-in Mic 12V DC/PoE. IP67, IK10, SMD Plus.

5 Megapixel

5MP IR Fixed Focal Dome WizSense Network Camera
IPC-HDBW3541EP-AS-0280B

5 megapixel, 1/2.7” CMOS, low illuminance, Outputs max. 5 megapixel (2592 x 1944) @20 fps & supports 4 megapixel (2688 x 1520) @25/30 fps IR distance: 50m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (classification of vehicle & human), Alarm: In, out, Audio: In, out, 12V DC/PoE, IP67, IK10, SMD Plus.

5 Megapixel

2MP IR Fixed Focal Dome WizSense Network **Camera**
IPC-HDBW3241FP-AS-M-0280B

2 megapixel, 1/2.8” CMOS, low illuminance, Outputs max. 2 megapixel (1920 x 1080)@30 fps, IR distance: 30m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire(support the classification of vehicle and human), Built-in Mic, 12V DC/PoE, IP67, IK10 .SMD Plus.

2 Megapixel

4MP IR Fixed Focal Dome WizSense Network Camera
IPC-HDBW3441EP-AS-0360B

4 megapixel, 1/3” CMOS, low illuminance, Outputs max. 4 megapixel (2688 x 1520)@30 fps, IR distance: 50m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (support the of vehicle and human), Alarm: In, out, Audio: In, out,12V DC/PoE, IP67, IK10, SMD Plus.

4 Megapixel

8MP Lite IR Fixed Focal Dome Network Camera
IPC-HDBW2831EP-S-0280B-S2

8 megapixel, 1/2.7” CMOS, low illuminance, Outputs max. 8 megapixel (3840 x 2160) @15 fps, & supports 2688 x 1520 (2688 x 1520) @25/30 fps, H.265 codec, max IR distance: 30m, WDRR,3D NR, HLC, BLC, Intrusion, tripwire,12V DC/PoE, IP67, IK10.

8 Megapixel

5MP Starlight/Lite AI IR (50M) Fixed Focal Turret Camera
IPC-HDW3541TMP-AS-0280B

5 megapixel, 1/2.7” CMOS, low illuminance, Outputs max. 5 megapixel (2592 x 1944) @20 fps, IR distance: 50m, Built-in Mic, DC12V/PoE power support, IP67.

5 Megapixel

4MP Lite Full-color Fixed Focal Eyeball Camera
IPC-HDW2439TP-AS-LED-0280B-S2

4 megapixel, 1/3” CMOS, low illuminance, Outputs 4 megapixel (2560 x 1440) @ 25/30 fps, Max. supports 4 megapixel (2688 x 1520) @ 20 fps, H.265 codec, Built-in warm lights, max. illumination distance: 30m, WDRR, 3D DNR, HLC, BLC..

5 Megapixel

8MP IR Vari-focal Eyeball WizSense Network Camera
IPC-HDW3841TP-ZAS-27135

8 megapixel, 1/2.8” CMOS, Outputs max. 8 megapixel, (3840 x 2160) @20 fps (AI), 8 megapixel (3840 x 2160) @25/30 fps (Non AI), IR range: 50m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (classification of vehicle & human), Built-in Mic, 12V DC/PoE, IP67, SMD Plus.

8 Megapixel

8MP IR Vari-focal Bullet WizSense Network Camera
IPC-HFW3841TP-ZAS-27135

8 megapixel, 1/2.8” CMOS, Outputs max. 8 megapixel (3840 x 2160) @20 fps (AI), 8 megapixel (3840 x 2160) @25/30 fps (Non AI), H.265, IR range: 60m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (classification of vehicle & human), Alarm: 1 in, 1 out, audio: 1 in, 1 out,12V DC/PoE, IP67, SMD Plus.

8 Megapixel

8MP IR Vari-focal Dome WizSense Network Camera
IPC-HDBW3841RP-ZAS-27135

8 megapixel, 1/2.8” CMOS, low illuminance, Outputs max. 8 megapixel (3840 x 2160) @20 fps (AI) & supports 8 megapixel (3840 x 2160) @25/30 fps (Non AI), IR distance: 40m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (classification of vehicle & human), Alarm: 1 in, 1 out, audio: 1 in, 1 out , 12V DC/PoE, IP67, IK10, SMD Plus.

8 Megapixel

5MP IR Fixed Focal Bullet WizMind Network Camera
IPC-HFW5541TP-AS-PV-0360B

5 megapixel 1/2.7” CMOS, Outputs max. 5 megapixel (2592 x 1944)@20 fps, 4 megapixel (2688 x 1520)@25/30 fps, H.265, Max. illumination range is 60m, WDRR, 3D NR, HLC, BLC, Wizmind AI Alarm: 1 in, 1 out, audio: 1 in, 1 out, Speaker, 12 VDC/PoE, IP67, IK10, SMD 3.0.

5 Megapixel

5MP Lite IR Fixed Focal Bullet Network Camera
IPC-HFW2531SP-S-0360B-S2

5 megapixel, 1/2.7” CMOS, Outputs max. 5 megapixel (2592 x 1944) @20 fps, 2688 x1520 (2688 x 1520) @25/30 fps, H.265, high compression rate, ultra-low bit rate, max IR range: 30m, WDRR, 3D NR, HLC, BLC, Intrusion, tripwire, 12V DC/PoE, IP67.

5 Megapixel

5MP IR Fixed Focal Eyeball WizMind Network Camera
IPC-HDW5541TMP-ASE-0280B

5 megapixel 1/2.7” CMOS, Outputs max. 5 megapixel (2592 x 1944)@20 fps, 4 megapixel (2688 x 1520)@25/30 fps. H.265, and the max. illumination range is 50m, SVC, smart H.264 +/ H.265+, AI H.264/H.265, coding, range WDRR, 3D NR, HLC, BLC, Wizmind AI, Built-in Mic, 12 VDC/PoE, ePoE, IP67.

5 Megapixel

5MP IR Vari-focal Eyeball WizMind Network Camera
IPC-HDW5541TP-ZE-27135

5 megapixel, 1/2.7” CMOS image sensor, low illuminance, Outputs max. 5 megapixel (2592 x 1944)@20 fps , & supports 4 megapixel (2688 x 520)@25/30 fps, IR distance: 40m, WDRR, 3D NR, HLC, BLC, Built-in Mic, 12V DC/PoE , ePoE network transmission over long distance, easy for installation, IP67, SMD 3.0.

5 Megapixel

4MP IR Fixed Focal Eyeball WizMind Network Camera
IPC-HDW5442TMP-ASE-0280B

4 megapixel 1/1.8” CMOS, Outputs max. 4 megapixel (2688 x 1520) @30 fps, H.265, Max. illumination range is 50m, WDRR, 3D NR, HLC, BLC, Intrusion, tripwire, fast moving (classification of vehicle & human), abandoned/ missing object, loitering, parking detection, heat map & face detection, Built-in Mic, 12 VDC/PoE, ePoE, IP67.

4 Megapixel

5MP IR Fixed Focal Eyeball WizMind Network Camera
IPC-HDW5541HP-AS-PV-0280B

5 megapixel 1/2.7” CMOS, Outputs max. 5 megapixel, (2592 x 1944)@20 fps,4 megapixel (2688 x 1520)@25/30 fps, H.265, IR range is 50m, WDRR, 3D NR, HLC, BLC, Wizmind AI, Alarm: 1 in, 1 out, audio: 1 in, 1 out, Built-in Mic & speaker, two-way talk, 12 VDC/PoE, IP67, SMD 3.0.

5 Megapixel

4MP WDRR Eyeball AI Network Camera
IPC-HDW5442TMP-AS-LED-0280B

1/1.8” 4 megapixel progressive scan CMOS, Smart H.264+/H.265+, 25/30 fps@2688 x 1520, 50/60 fps@1080P (1920 x 1080), WDRR (140 dB), Day/ Night (Electronic), 3D DNR, AWB, AGC, BLC 2.8mm fixed lens, Built-in Mic, Max. LEDs Length 20m, IP67.

4 Megapixel

5MP IR Vari-focal Bullet WizMind Network Camera
IPC-HFW5541EP-ZE-0735

5 megapixel 1/2.7” CMOS, Outputs max. 5 megapixel (2592 x 1944)@20 fps, 4 megapixel (2688 x 1520)@25/30 fps. Max. illumination range is 60m, WDRR, 3D NR, HLC, BLC, Three switchable intelligent resources: IVS, face detection, and people counting, Alarm: 2 in, 1 out, audio: 1 in, 1 out, 12 VDC/PoE, IP67 and IK10, ePoE, SMD 3.0.

5 Megapixel

4MP Vari-focal Bullet WizMind Network Camera
IPC-HFW5442HP-ZHE-2712

4 megapixel, 1/1.8” CMOS, Outputs max. 4 megapixel (2688 x 1520) @30 fps, IR range 60m WDRR, 3D NR, HLC, BLC, Alarm: 3 in, 2 out, audio: 1 in, 1 out, Micro SD card, 12V DC/PoE ePoE, IP67, IK10 , Heater, SMD 3.0.

4 Megapixel

5MP Full-color Warm LED Bullet WizSense Network Camera
IPC-HFW3549EP-AS-LED-0360B

5 megapixel, 1/2.7” CMOS, Outputs max. 5 megapixel (2592 x 1944) @20 fps, 4 megapixel (2688 x 1520) @25/30 fps, H.265, Built-in warm light, max. illumination range: 30m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (classification of vehicle & human), Alarm: 1 in, 1 out, Audio: 1 in, 1 out, Built-in Mic, 12V DC/PoE, IP67, SMD Plus.

5 Megapixel

5MP IR Fixed Focal Bullet WizSense Network Camera
IPC-HFW3541EP-AS-0360B

5 megapixel, 1/2.7” CMOS, Outputs max. 5 megapixel (2592 x 1944) @20 fps, 4 megapixel (2688 x 1520) @25/30 fps, H.265, IR range: 50m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (classification of vehicle & human), Alarm: In, out, Audio: In, out, Built-in Mic, 12V DC/PoE, IP67, SMD Plus.

5 Megapixel

2MP IR Fixed Focal Bullet WizSense Network Camera
IPC-HFW3241EP-AS-0360B

2 megapixel, 1/2.8” CMOS, Outputs max. 2 megapixel (1920 x 1080)@30 fps, H.265, IR range: 50m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (classification of vehicle & human), Alarm: In, out, Audio: In, out, Built-in Mic, 12V DC/PoE, IP67, SMD Plus.

2 Megapixel

8MP Lite IR Fixed Focal Bullet Network Camera
IPC-HFW2831TP-AS-0360B-S2

8 megapixel, 1/2.7” CMOS, Outputs max. 8 megapixel (3840 x 2160) @15 fps, 2688 x 1520 (2688 x 1520) @25/30 fps, H.265, Max IR range: 80m, WDRR, 3D NR, HLC, BLC, Intrusion, tripwire, Alarm: 1 in, 1 out, audio: 1 in, 1 out, 12V DC/PoE, IP67, IK10 (optional).

8 Megapixel

5MP Full-color Warm LED Bullet WizSense Network Camera
IPC-HFW3549EP-AS-LED-0280B

5 megapixel, 1/2.7” CMOS , Outputs max. 5 megapixel (2592 x 1944) @20 fps, 4 megapixel (2688 x 1520) @25/30 fps, H.265, Built-in warm light, max. illumination range: 30m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (classification of vehicle & human), Alarm: 1 in, 1 out, Audio: 1 in, 1 out, Built-in Mic, 12V DC/PoE , IP67, SMD Plus.

5 Megapixel

5MP Full-color Warm LED Eyeball WizSense Network Camera
IPC-HDW3549TMP-AS-LED-0280B

5 megapixel, 1/2.7” CMOS, Outputs max. 5 megapixel (2592 x 1944) @20 fps, 4 megapixel (2688 x 1520) @25/30 fps, H.265, Built-in warm light, max. illumination range: 30m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (classification of vehicle & human), Built-in Mic, 12V DC/PoE, IP67,SMD Plus.

5 Megapixel

5MP Lite IR Vari-focal Dome Network Camera
IPC-HDBW2531R-ZS-S2

5 megapixel, 1/2.7” CMOS, Outputs max. 5 megapixel (2592 x 1944) @20 fps, 2688 x 1520 (2688 x 1520) @25/30 fps, Max IR range: 40m, WDRR, 3D NR, HLC, BLC, Intrusion, tripwire, 12V DC/PoE, IP67, IK10.

5 Megapixel

5MP WizMind IR Fisheye Network Camera
IPC-EW5541-AS

5 megapixel, 1/2.7” CMOS, Outputs max. 5 megapixel (2592 x 1944) @25/30 fps, Built-in efficient IR illuminator, and the max. illumination range: 10m, 120dB WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire, people counting in area, Heat Map, Alarm: 1 in, 1 out, audio: 1 in, 1 out, Built-in Mic, 12V DC/PoE.

5 Megapixel

4MP IR Vari-focal Dome WizMind Network Camera
IPC-HDBW5442E-ZE

4 megapixel 1/1.8” CMOS, Outputs max. 4 megapixel (2688 x 1520)@30 fps, and the max. illumination range is 40m, WDRR, 3D NR, HLC, BLC, Three switchable intelligent resources: IVS, face detection, and people counting, Alarm: 1 in, 1 out, audio: 1 in, 1 out, Micro SD card, 24 VAC/12 VDC/ PoE, ePoE, IP67 and IK10,SMD 3.0.

4 Megapixel

4MP IR Vari-focal Bullet WizMind Network Camera
IPC-HFW5442E-ZE

4 megapixel 1/1.8” CMOS, Outputs max. 4 megapixel (2688 x 1520)@30 fps, Illumination range is 60m, WDRR, 3D NR, HLC, BLC, Three switchable intelligent resources: IVS, face detection, and people counting, Alarm: 2 in, 1 out, audio: 1 in, 1 out, 12 VDC/PoE, IP67 and IK10, ePoE, SMD 3.0.

4 Megapixel

4MP IR Vari-focal Bullet WizMind Network Camera
IPC-HFW5442EP-ZE-0832

4 megapixel 1/1.8” CMOS, Outputs max. 4 megapixel (2688 x 1520)@30 fps, Illumination range 120m, Intrusion, tripwire, Wizmind AI, Alarm: 2 in, 1 out, audio: 1 in, 1 out, 12 VDC/PoE, ePoE, IP67, IK10, SMD 3.0.

4 Megapixel

2MP IR Vari-focal Bullet WizMind Network Camera
IPC-HFW5241EP-ZE-27135

2 megapixel 1/2.8” CMOS, Outputs max. 2 megapixel (1920 x 1080)@30 fps, Built-in IR LED, and the max. illumination distance is 60m, WDRR, 3D NR, HLC, BLC, Three switchable intelligent resources: IVS, face detection, and people counting, Alarm: 2 in, 1 out, audio: 1 in, 1 out 12 VDC/PoE, IP67 and IK10, ePoE, SMD 3.0.

2 Megapixel

2MP IR Vari-focal Bullet WizMind Network Camera
IPC-HFW5241EP-ZE-0560

2 megapixel 1/2.8” CMOS, Outputs max. 2 megapixel (1920 x 1080)@30 fps, Built-in IR LED, and the max. illumination distance is 150m, WDRR, 3D NR, HLC, BLC, Three switchable intelligent resources: IVS, face detection, and people counting, Alarm: 2 in, 1 out, audio: 1 in, 1 out 12 VDC/PoE, IP67 and IK10, ePoE,SMD 3.0.

2 Megapixel

5MP TiOC 2.0 Smart Dual Illumination
Fixed Focal Eyeball Dome
IPC-HDW3549HP-AS-PV-0280B-S4-G

5 megapixel, 1/2.7” CMOS, Outputs max. 5 megapixel (2592 x 1944) @20 fps, & supports 4 megapixel (2688 x 1520) @25/30 fps, max. illumination distance: 30m, Smart H.264+/H.265+, WDRR, 3D DNR, HLC, BLC.

5 Megapixel

5MP Starlight/Lite AI IR (40M) Vari Focal Eyeball Dome
IPC-HDW3541TP-ZAS-27135-G

5 megapixel, 1/2.7” CMOS, low illuminance, Outputs max. 5 megapixel (2592 x 1944)@20 fps, H.265 codec, IR distance: 40m, Built-in Mic, DC12V/PoE, IP67, SMD.

5 Megapixel

5MP Starlight/Lite AI IR (50M) Fixed Focal Turret Camera
IPC-HDW3541EM-AS-0280-G

5 megapixel, 1/2.7” CMOS, low illuminance, Outputs max. 5 megapixel (2592 x 1944) @20 fps, IR distance: 50m, Built-in Mic, DC12V/PoE power support, IP67, SMD.

5 Megapixel

8MP IP TiOC 2.0 Smart Dual Illumination Fixed Focal Eyeball Dome
IPC-HDW3849H-AS-PV-0280-S3-G

8 megapixel, 1/2.8” CMOS, low illuminance, Outputs max. 8 megapixel (3840 x 2160) @20 fps (AI)& supports 8 megapixel (3840 x 2160) @25/30 fps (with AI function disabled), H.265 codec, max. illumination 30m.

8 Megapixel

5MP IR Vari-focal Bullet WizSense Network Camera
IPC-HFW3541TP-ZAS-G

5 megapixel, 1/2.7” CMOS, Outputs max. 5 megapixel (2592 x 1944) @20 fps, and supports 4 megapixel (2688 x 1520) @25/30 fps, Built-in IR LED, max. IR distance: 60m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (classification of vehicle and human), Alarm: In, out, Audio: In, out, 12V DC/PoE IP67, SMD Plus.

5 Megapixel

8MP IP TiOC 2.0 Smart Dual Illumination Fixed Focal Eyeball Dome
IPC-HDW3849HP-AS-PV-0360B-S3

8 megapixel, 1/2.8” CMOS, low illuminance, Outputs max. 8 megapixel (3840 x 2160) @20 fps (AI)& supports 8 megapixel (3840 x 2160) @25/30 fps (with AI function disabled), H.265 codec, max. illumination 30m.

5MP TiOC 2.0 Smart Dual Illumination Fixed Focal Eyeball Dome
IPC-HDW3549HP-AS-PV-0360B-S3

5 megapixel, 1/2.7” CMOS, Outputs max. 5 megapixel (2592 x 1944) @20 fps, & supports 4 megapixel (2688 x 1520) @25/30 fps, max. illumination distance: 30m, Smart H.264+/H.265+, WDRR, 3D DNR, HLC, BLC.

8MP TiOC 2.0 Smart Dual Illumination
Fixed Focal Bullet
IPC-HFW3849T1P-AS-PV-0360B-S3

8 megapixel 1/2.8” CMOS image sensor, Outputs max. 8 megapixel (3840 x 2160)@25/30 fps, Built-in warm light and IR LED, Intelligent monitoring: Intrusion, tripwire (classification of vehicle and human), Alarm: 1 in, 1 out; audio: 1 in, 1 out; built-in dual MICs; 1-ch speaker; 12 VDC/PoE power supply, IP67 protection, Sound and light alarm, SMD 3.0.

5MP TiOC 2.0 Smart Dual Illumination
Fixed Focal Bullet
IPC-HFW3549T1P-AS-PV-0360B-S3

5 megapixel, 1/2.7” CMOS, low luminance, Outputs max, 5 megapixel (2592 x 1944) @20fps & supports 4 megapixel (2688 x, Built-in warm light and IR LED, the max, IR illumination distance is 30m, Smart H.264+/H.265+, AI, H.264/H.265.

8MP Lite IR Vari-focal Dome Network Camera
IPC-HDBW2831R-ZAS-S2

8 megapixel, 1/2.7” CMOS, Outputs max, 8 megapixel (3840 x 2160) @15 fps, 2688 x 1520 @25/30 fps, H.265, Max IR range: 60m, WDRR, 3D, NR, HLC, BLC, Intrusion, tripwire, Alarm: 1 in, 1 out, audio: 1 in, 1 out, 12V DC/PoE, IP67, IK10.

8 Megapixel

5MP IR Vari-focal Bullet WizSense Network Camera
IPC-HFW3541T-ZAS

5 megapixel, 1/2.7” CMOS, Outputs max. 5 megapixel (2592 x 1944) @20 fps, and supports 4 megapixel (2688 x 1520) @25/30 fps, Built-in IR LED, max. IR distance: 60m, Rotation mode, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (Classification of vehicle and human), Alarm: In, out, Audio: In, out, 12V DC/PoE, IP67, SMD Plus.

5 Megapixel

2MP IR Vari-focal Bullet WizSense Network Camera
IPC-HFW3241T-ZAS

2 megapixel, 1/2.8” CMOS, Outputs max. 2 megapixel (1920 x 1080)@30 fps, Built-in IR LED, max. IR distance: 60m, Rotation mode, WDRR, 3D, DNR, HLC, BLC, Intrusion, tripwire (support the classification and accurate detection of vehicle and human), Alarm: In, out, Audio: In, out, 12V DC/PoE, IP67, IK10, SMD Plus.

2 Megapixel

5MP Starlight/Lite AI IR (40M) Vari-Focal Eyeball Dome
IPC-HDW3541T-ZAS

5 megapixel, 1/2.7” CMOS, low illuminance, Outputs max. 5 megapixel (2592 x 1944)@20fps, H.265 codec, IR distance: 40m, Built-in Mic, DC12V/PoE, IP67, SMD.

5 Megapixel

2MP IR Vari-focal Eyeball WizSense Network Camera
IPC-HDW3241TP-ZAS-27135

2 megapixel, 1/2.8” CMOS, 2 megapixel (1920 x 1080)@30 fps, Built-in IR LED, max. IR distance: 40 m, Intelligent detection: Intrusion, tripwire (detection of vehicle and human), Built-in Mic, 12V DC/PoE, IP67 protection, SMD Plus.

2 Megapixel

5MP IR Vari-focal Dome WizSense Network Camera
IPC-HDBW3541R-ZAS

5 megapixel, 1/2.7” CMOS, Outputs max. 5 megapixel (2592 x 1944) @20 fps, 4 megapixel (2688 x 1520) @25/30 fps, H.265, IR range: 40m WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (classification of vehicle & human), Alarm: In, out, Audio: In, out, 12V DC/PoE, IP67, IK10, SMD Plus.

5 Megapixel

5MP Lite IR Vari-focal Bullet Network Camera
IPC-HFW2531T-ZAS-S2

5 megapixel, 1/2.7” CMOS, Outputs max. 5 megapixel (2592 x 1944) @20 fps, and supports 2688 x 1520 (2688 x 1520) @25/30 fps, Support Triple Stream, Built-in IR LED, max IR distance: 60m, Rotation mode, WDRR, 3D NR, HLC, BLC, Intelligent detection: Intrusion, tripwire, Alarm: 1 in, 1 out, audio: 1 in, 1 out, 12V DC/PoE, IP67.

5 Megapixel

5MP Lite IR Vari-focal Eyeball Network Camera
IPC-HDW2531T-ZS-S2

5 megapixel, 1/2.7” CMOS ,low illuminance, Outputs max. 5 megapixel (2592 x 1944) @20 fps, 2688 x1520 (2688 x 1520) @25/30 fps, Max IR range: 40m, WDRR, 3D NR, HLC, BLC, Intrusion, tripwire, 12V DC/PoE, IP67.

5 Megapixel

8MP Lite IR Vari-focal Eyeball Nework Camera
IPC-HDW2831T-ZS-S2

8 megapixel, 1/2.7” CMOS, 8 megapixel (3840 x 2160) @15 fps, and supports 2688x1520 (2688 x 1520) @25/30 fps, Built-in IR LED, max IR distance: 40 m, Intelligent detection: Intrusion, tripwire, 12V DC/PoE power supply.

8MP Lite IR Vari-focal Bullet Network Camera
IPC-HFW2831T-ZAS-S2

8 megapixel, 1/2.7” CMOS, Outputs max. 8 megapixel (3840 x 2160) @15 fps, and supports 2688 x1520 (2688 x 1520) @25/30 fps, Built-in IR LED, max IR distance: 60m, ROI, Smart H.264+/H.265+, Rotation mode, WDRR, 3D NR, HLC, BLC, Intrusion, tripwire, Alarm: 1 in, 1 out, audio: 1 in, 1 out, 12V DC/PoE, IP67.

5MP IR Vari-focal Dome WizMind Network Camera
IPC-HDBW5541E-ZE

5 megapixel 1/2.7” CMOS, Outputs max, 5 megapixel (2592 x 1944)@20 fps, 4 megapixel (2688 x 1520)@25/30 fps, Max. illumination range is 40m, WDRR, 3D NR, HLC, BLC, Three switchable intelligent resources: IVS, face detection, and people counting, Alarm: 1 in, 1 out, audio: 1 in, 1 out, 24 VAC/12 VDC/PoE ePoE, IP67 and IK10, SMD.

5MP IR Vari-focal Bullet WizMind Network Camera
IPC-HFW5541E-ZE

4 megapixel 1/1.8” CMOS, Outputs max. 4 megapixel (2688 x 1520)@30 fps, Illumination range is 60m, WDRR, 3D NR, HLC, BLC, Three switchable intelligent resources: IVS, face detection, and people counting, Alarm: 2 in, 1 out, audio: 1 in, 1 out, 12 VDC/PoE, IP67 and IK10, ePoE, SMD 3.0.

8MP Smart Dual Illumination Active Deterrence Fixed-focal Bullet WizSense Network Camera
IPC-HFW3849T1P-AS-PV-0280B-S3

8 megapixel 1/2.8” CMOS, 8 megapixel (3840 x 2160)@25/30 fps, Built-in warm light and IR LED, Intelligent monitoring: Intrusion, tripwire (detection of vehicle and human), Alarm: 1 in, 1 out; audio: 1 in, 1 out; buit-in dual MICs; 1-ch speaker, 12 VDC/PoE power supply, IP67 protection, Sound and light alarm (red and blue lights), SMD 3.0.

8 Megapixel

5MP TiOC 2.0 Smart Dual Illumination
Fixed Focal Bullet
IPC-HFW3549T1P-AS-PV-0280B-S3

5 megapixel, 1/2.7” CMOS, low luminance, Outputs max. 5 megapixel (2592 x 1944)@20 fps & supports 4 megapixel (2688 x, Built-in warm light and IR LED, the max. IR illumination distance is 30m, Smart H.264+/H.265+, AI H.264/H.265.

5 Megapixel

5MP TiOC 2.0 Smart Dual Illumination
Fixed Focal Eyeball Dome
IPC-HDW3549HP-AS-PV-0280B-S3

5 megapixel, 1/2.7” CMOS, Outputs max. 5 megapixel (2592 x 1944) @20 fps, & supports 4 megapixel (2688 x 1520) @25/30 fps, max. illumination distance: 30m, Smart H.264+/H.265+, WDRR, 3D DNR, HLC, BLC .

5 Megapixel

8MP IP TiOC 2.0 Smart Dual Illumination Fixed Focal Eyeball Dome
IPC-HDW3849HP-AS-PV-0280B-S3

8 megapixel, 1/2.8” CMOS, low illuminance, Outputs max, 8 megapixel (3840 x 2160) @20 fps (AI)& supports 8 megapixel (3840 x 2160) @25/30 fps (with AI function disabled), H.265 codec, max. illumination 30m.

8 Megapixel

8MP IR Fisheye WizMind Network Camera
IPC-EBW8842P-AS

8 megapixel 1/1.7” CMOS, Outputs max. 8m (3280 x 2480) @25/30 fps, Max. illumination range is 10m, Intrusion, tripwire, heat map, and people counting. Alarm: 2 in, 2 out, audio: 1 in, 1 out, Built-in dual, array Mic and speaker, 12V DC/PoE, IP67 and IK10.

8 Megapixel

4x2MP WizMind Multi-Sensor PanoraMic Network IR Bullet Camera
IPC-PFW8840-A180

Four 2 megapixel 1/2.8” CMOS, Outputs max. 8 megapixel (4096 x 1800) @30 fps, Built-in IR LED, max. IR distance: 30m, DWDRR, 3D NR, HLC, BLC CroWDR distribution map, Vehicle Density situation Alarm: 2 in, 2 out, audio: 1 in, 1 out, 485, BNC, 12V DC/24V AC/PoE, Supports object tracking, IP67, IK10.

2 Megapixel

8MP IR Fixed Focal Bullet WizSense Network Camera
IPC-HFW3841EP-AS-0280B

8 megapixel, 1/2.8” CMOS, Outputs max. 8 megapixel (3840 x 2160) @20 fps (AI)& supports 8 megapixel (3840 x 2160) @25/30 fps (Non AI, H.265, IR range: 30m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (classification of vehicle & human), Alarm: 1 in, 1 out, audio: 1 in, 1 out, 12V DC/PoE, IP67, SMD Plus.

8 Megapixel

8MP IR Fixed Focal Eyeball WizSense Network Camera
IPC-HDW3841EMP-AS-0360B

8 megapixel, 1/2.8” CMOS, Outputs max, 8 megapixel (3840 x 2160) @20 fps (AI) 8 megapixel (3840 x 2160) @25/30 fps (Non AI) IR range: 30m, WDRR, 3D DNR, HLC, BLC, Intrusion, tripwire (classification of vehicle & human), Built-in Mic, 12V DC/PoE, IP67, SMD Plus.

8 Megapixel

8MP IP TiOC Full-color Fixed Focal Eyeball Dome
IPC-HDW3849HP-AS-PV-0280B

8 megapixel, 1/2.8” CMOS, low illuminance, Outputs max. 8 megapixel (3840 x 2160) @20fps (AI)& supports 8 megapixel (3840 x 2160) @25/30fps (with AI function disabled), H.265 codec, max. illumination 30m.

8 Megapixel

4MP Smart Dual Illumination Fixed Focal Eyeball WizSense Network Camera
IPC-HDW2449TMP-S-IL-0280B

4 megapixel 1/2.9” CMOS image sensor, Outputs max. 4 megapixel (2688 x 1520)@20fps, supports 2560 x 1440 @25/30 fps, Max. 256 Micro SD, Built-in Mic, IP67 protection, SMD Plus.

4 Megapixel

4MP Smart Dual Illumination Fixed Focal Eyeball WizSense Grey Network Camera
IPC-HDW2449TMP-S-IL-0280B-G

4 megapixel 1/2.9” CMOS image sensor, Outputs max. 4 megapixel (2688 x 1520)@20 fps,supports 2560 x 1440 @25/30fps, Max. 256 Micro SD, Built-in Mic, IP67 protection, SMD Plus.

4 Megapixel

4MP Smart Dual Illumination Fixed Focal Bullet WizSense Network Camera
IPC-HFW2449SP-S-IL-0280B

4 megapixel 1/2.9” CMOS image sensor, Outputs max. 4 megapixel (2688 x 1520)@20fps, supports 2560 x 1440 @25/30 fps, Max. 256 Micro SD, Built-in Mic, IP67 protection, SMD Plus.

4 Megapixel

Access ANPR Camera
ITC415-PW6M-IZ-GN-C2

Deep learning algorithm for accurate recognition of vehicles without license plate, and vehicle model, vehicle logo, vehicle series, vehicle color. Capture Distance 3 m–6 m (9.84 ft–19.69 ft).

4 Megapixel

Access ANPR Camera
ITC437-PW6M-IZ-GN-C2

Deep learning algorithm for accurate recognition of vehicles without license plate, and vehicle model, vehicle logo, vehicle series, vehicle colour, and more. Capture Range 8 m–30 m
(26.25 ft to 98.42 ft)

4 Megapixel

alhua TECHNOLOGY | Smart Dual Light

Smart Dual-Light Technology

The **Smart Dual-Light** camera from Dahua features **two types of illuminators – infrared and white light.** They default to using infrared light for surveillance, but switch to warm LED light when detecting human presence to record in colour and minimise light pollution.

With Dahua's advanced Deep-Learning algorithm, the camera can accurately **detect targets, prevent false triggering** and **filter out non-relevant objects**, making it perfect for both home and business surveillance.

These cameras are a smart, efficient, and eco-friendly solution for your surveillance needs.

Available in **HDCVI** and **IPC** models.

HDCVI Bullet | **HDCVI Eyeball** | **IPC Eyeball** | **IPC Bullet**

Smart Dual-Light

AI Deep-Learning Algorithm

Illumination Mode Configuration

Illumination By Schedule

NETWORK VIDEO RECORDERS (NVR)

Dahua Naming Rule
Network Video Recorders (NVR)

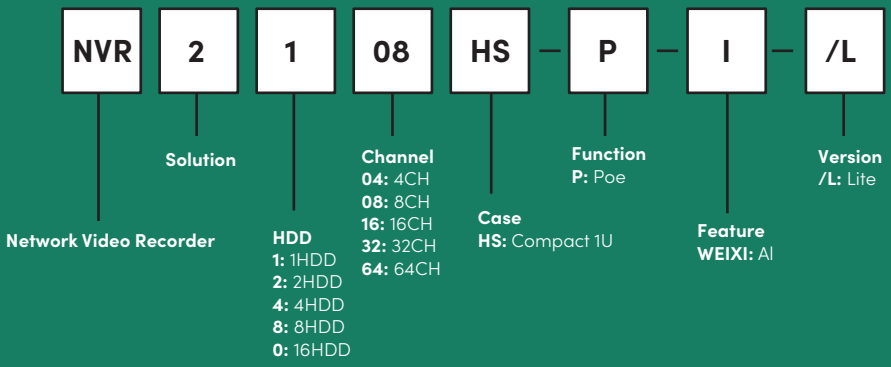

4 channel Smart 1U 1HDD 4PoE Network Video Recorder NVR2104HS-P-I2

Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format, Max. decoding capability: 6 x 1080p@30fps. Supports adaptive decoding, 1 channel face detection and recognition (AI by NVR), 1 channel perimeter protection (AI by NVR), up to 10 face databases and 5,000 face images, 4 channel SMD Plus (AI by NVR), AI by camera: Face detection and recognition, perimeter protection, and SMD Plus Connected to the third-party network cameras.

NVR2104HS-P-I2	0TB
NVR2104HS-P-I2/1TB	1TB
NVR2104HS-P-I2/2TB	2TB
NVR2104HS-P-I2/4TB	4TB

4 Channel

8 channel Compact 1U 4PoE 1HDD WizSense Network Video Recorder NVR2108HS-P-I2

Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format, Max. decoding capability: 6 x 1080p@30fps. Supports adaptive decoding, 1 channel face detection and recognition (AI by NVR), 1 channel perimeter protection (AI by NVR), up to 10 face databases and 5,000 face images, 4 channel SMD Plus (AI by NVR), AI by camera: Face detection and recognition, perimeter protection, and SMD Plus Connected to the third-party network cameras.

NVR2108HS-P-I2	0TB
NVR2108HS-P-I2-2TB	2TB
NVR2108HS-P-I2-4TB	4TB
NVR2108HS-P-I2-6TB	6TB
NVR2108HS-P-I2-8TB	8TB

8 Channel

4 channel Compact 1U 1HDD 4PoE Network Video Recorder
NVR4104HS-P-4KS2/L

H.264, H.265, Smart H.264+, and Smart H.265+ H.265 auto switch, Max. decoding capability: 8 x 1080p@30fps, Supports adaptive decoding, Supports mainstream cameras of ONVIF and RTSP protocols, P2P remote surveillance, video play on mobile device, VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K, AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD, Supports remote configuration and management of IPC.

NVR4104HS-P-4KS2/L	0TB
NVR4104HS-P-4KS2/L-2TB	2TB
NVR4104HS-P-4KS2/L-4TB	4TB
NVR4104HS-P-4KS2/L-6TB	6TB
NVR4104HS-P-4KS2/L-8TB	8TB
NVR4104HS-P-4KS2/L-10TB	10TB

4 Channel

8 channel Compact 1HDD 1U 8PoE Network Video Recorder
NVR4108HS-8P-4KS2/L

H.264, H.265, Smart H.264+, and Smart H.265+. H.265 auto switch, Max. decoding capability: 8 x 1080p@30fps, Supports adaptive decoding, Supports mainstream cameras of ONVIF and RTSP protocols, P2P remote surveillance, video play on mobile device, VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K, AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD, Supports remote configuration and management of IPC

NVR4108HS-8P-4KS2/L	0TB
NVR4108HS-8P-4KS2/L-2TB	2TB
NVR4108HS-8P-4KS2/L-4TB	4TB
NVR4108HS-8P-4KS2/L-6TB	6TB
NVR4108HS-8P-4KS2/L-8TB	8TB
NVR4108HS-8P-4KS2/L-10TB	10TB

8 Channel

8 channel 1U 2HDDs 8PoE Network Video Recorder
NVR4208-8P-4KS2/L

H.264, H.265, Smart H.264+, and Smart H.265+, H.265, auto switch, Max. decoding capability: 8 x 1080p@30fps, Supports adaptive decoding, Supports mainstream cameras of ONVIF and RTSP protocols, P2P remote surveillance, video play on mobile device, VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K, AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD, Supports remote configuration and management of IPC, such as setting parameters, getting information, and upgrading IPC of the same model in batches.

NVR4208-8P-4KS2/L	0TB
NVR4208-8P-4KS2/L-2TB	2TB
NVR4208-8P-4KS2/L-4TB	4TB
NVR4208-8P-4KS2/L-6TB	6TB
NVR4208-8P-4KS2/L-8TB	8TB
NVR4208-8P-4KS2/L-12TB	12TB

8 Channel

16 channel 1U 2HDDs Network Video Recorder
NVR4216-16P-4KS2/L

H.264, H.265, Smart H.264+, and Smart H.265+, H.265 auto switch, Max. decoding capability: 8 x 1080p@30fps, Supports adaptive decoding, Supports mainstream cameras of ONVIF and RTSP protocols, P2P remote surveillance, video play on mobile device, VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K, AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD, Supports remote configuration and management of IPC

NVR4216-16P-4KS2/L	0TB
NVR4216-16P-4KS2/L-2TB	2TB
NVR4216-16P-4KS2/L-4TB	4TB
NVR4216-16P-4KS2/L-6TB	6TB
NVR4216-16P-4KS2/L-8TB	8TB
NVR4216-16P-4KS2/L-12TB	12TB

16 Channel

8 channel 1U 2HDDs 8PoE 4K & H.265 Pro Network Video Recorder
NVR5208-8P-4KS2E

8 channel IP video access, Smart H.265+/Smart H.264+/H.265/H.264/MJPEG, H.265 auto switch, Max 320 Mbps incoming bandwidth, Up to 24 megapixel resolution for live view and playback, 1 channel fisheye dewarping (AI by NVR), AI by Camera: Perimeter protection, face detection and recognition, SMD Plus, video metadata, ANPR, people counting, stereo analysis, crowd distribution, heat map, Support IPC UPnP, 8 PoE ports.

NVR5208-8P-4KS2E	0TB
NVR5208-8P-4KS2E-2TB	2TB
NVR5208-8P-4KS2E-4TB	4TB
NVR5208-8P-4KS2E-6TB	6TB
NVR5208-8P-4KS2E-8TB	8TB
NVR5208-8P-4KS2E-10TB	10TB
NVR5208-8P-4KS2E-12TB	12TB
NVR5208-8P-4KS2E-16TB	16TB

8 Channel

16 channel 1U 2HDDs 16PoE 4K & H.265 Pro Network Video Recorder
NVR5216-16P-4KS2E

16 channel IP video access, Smart H.265+/Smart , H.264+/H.265/H.264/MJPEG, H.265 auto switch, Max 320 Mbps incoming bandwidth, Up to 24 megapixel resolution for live view and playback, 1 channel fisheye dewarping (AI by NVR), AI by Camera: Perimeter protection, face detection and recognition, SMD Plus, video metadata, ANPR, people counting, stereo analysis, crowd distribution, heat map, Support IPC UPnP, 16 PoE ports.

NVR5216-16P-4KS2E	0TB
NVR5432-16P-4KS2E-2TB	2TB
NVR5432-16P-4KS2E-4TB	4TB
NVR5432-16P-4KS2E-6TB	6TB
NVR5432-16P-4KS2E-8TB	8TB
NVR5432-16P-4KS2E-10TB	10TB
NVR5432-16P-4KS2E-12TB	12TB
NVR5432-16P-4KS2E-16TB	16TB

16 Channel

32 channel 1.5U 4HDDs 16PoE 4K & H.265 Pro Network Video Recorder
NVR5432-16P-4KS2E

32 channel IP video access, Smart H.265+/Smart H.264+/H.265/H.264/MJPEG, H.265 auto switch, Max 320 Mbps incoming bandwidth, Up to 24 megapixel resolution for live view and playback, 1 channel fisheye dewarping (AI by NVR), AI by Camera: Perimeter protection, face detection and recognition, SMD Plus, video metadata, ANPR, people counting, stereo analysis, crowd distribution, heat map, Support IPC UPnP, 16 PoE ports.

NVR5432-16P-4KS2E	0TB
NVR5432-16P-4KS2E-12TB	12TB
NVR5432-16P-4KS2E-16TB	16TB
NVR5432-16P-4KS2E-18TB	18TB
NVR5432-16P-4KS2E-20TB	20TB
NVR5432-16P-4KS2E-24TB	24TB
NVR5432-16P-4KS2E-30TB	30TB

32 Channel

64 channel 2U 4K&H.265 Pro Network Video Recorder
NVR5864-R-4KS2

32 Channel IP Viedo access,
Smart H.265+/H.265/Smart H.264+/H.264/MJPEG, Max 320Mbps Incoming Bandwidth, Up to 12 megapixel Resolution for Preview and Playback, 2HDMI/2VGA simultaneous video output

NVR5864-R-4KS2	0TB
NVR5864-R-4KS2-16TB	16TB
NVR5864-R-4KS2-18TB	18TB
NVR5864-R-4KS2-20TB	20TB
NVR5864-R-4KS2-24TB	24TB
NVR5864-R-4KS2-32TB	32TB
NVR5864-R-4KS2-36TB	36TB
NVR5864-R-4KS2-48TB	48TB

64 Channel

PTZ Cameras

Dahua Naming Rule
PTZ Cameras

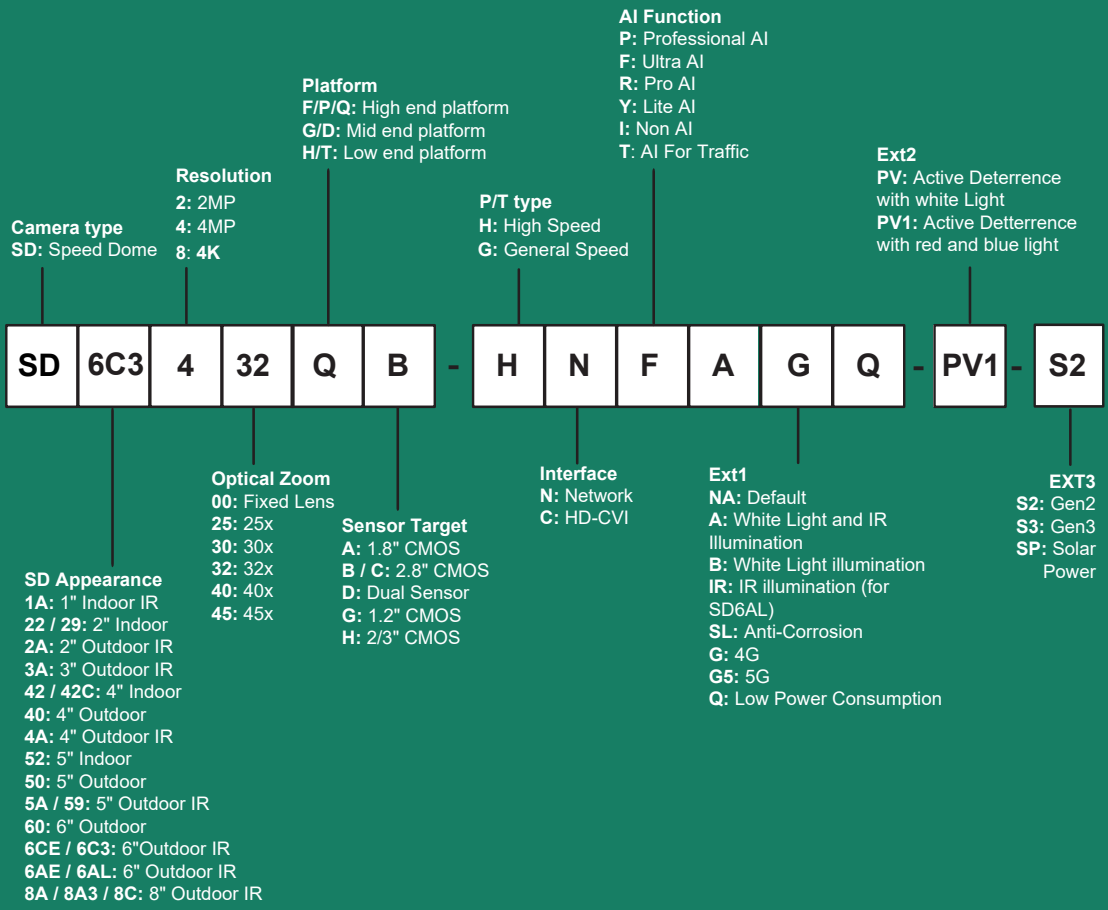

PTZ Cameras

2MP 4x Starlight HDCVI PTZ Camera
SD22204-GC-LB

1/2.8” 2 megapixel STARVIS™ CMOS, Powerful 4x optical zoom, Starlight technology, 120 dB true WDR, 3D DNR, Max. 25/30 fps@1080P, 25/30/50/60 fps@720P, IP66, IK10.

2 Megapixel

2MP 25x Starlight IR PTZ HDCVI Camera
SD49225-HC-LA

1/2.8” 2 megapixel STARVIS™ CMOS, Powerful 25x optical zoom, Starlight technology, 120 dB true WDR, 3D DNR, Max. 25/30 fps@1080P, 25/30/50/60 fps@720P, IR distance up to 100m, IP66 Includes PFB305W Wall Mount, DC12V.

2 Megapixel

2MP 25x Starlight IR WizSense Network PTZ Camera
SD49225XA-HNR

1/2.8” 2megapixel CMOS, 25x optical zoom, Starlight technology, Max. 50/60fps@1080p
IR distance up to 100m, Perimeter protection, SMD Plus, IP66.

2 Megapixel

4MP 25x Starlight IR (100m) PTZ AI Camera
SD49425XB-HNR

1/2.8” 4 megapixel CMOS, Powerful 25x optical zoom, Starlight technology, Max.25/30fps@4M, Deep-learning-based auto tracking and perimeter protection, Support PoE +, IR distance up to 100m, SMD, IP66.

4 Megapixel

2MP 25x Starlight IR WizSense Network Camera
SD5A225-GB-HNR

1/2.8" 2Megapixel STARVIS™ CMOS.Powerful 25x optical zoom. IR distance up to 150 m, Auto Tracking 3.0, Face Detection, SMD 4.0. Quick Pick, POE+, IP67, IK10

2MP 25x Starlight IR WizSense Network PTZ Camera
SD5A225XA-HNR

1/2.8” 2Megapixel STARVIS™ CMOS, Powerful 25x optical zoom, Starlight Technology, Max. 50/60fps@1080P, IR distance up to 150m, SMD Plus, Deep-learning-based perimeter protection, Auto-tracking and IVS, PoE+, IP67, IK10.

2 Megapixel

2 Megapixel

4MP 45x Starlight IR WizMind Network PTZ Camera
SD6AL445XA-HNR

1/2.8” 4 megapixel CMOS Powerful 45x optical zoom Starlight technology, Max. 25/30 fps@4 megapixel, Deep-learning-based auto tracking and perimeter protection, Support face detection, Support Hi-PoE, SMD Plus, IP67.

4MP 25x TIOC IP PTZ Dome IR (150m)
SD6C3425XB-HNR-A-PV1

1/2.8” 4 megapixel STARVIS™ CMOS, Powerful 25x optical zoom, Starlight technology, IR distance up to 150m, Perimeter protection, Face detection, Metadata, Full-color illuminator, red and blue warning light, IP66, Smart dual illuminators.

4 Megapixel

4 Megapixel

alhua TECHNOLOGY

DSS PRO

More than a **Video Management System**

Wiz Mind

Wiz Sense

Full Colour

iNSIDER

TiOC

HDCVI 6.0

Camera Mounting Accessories

	PFA101	Adapter Plate	
	PFA106	Adapter Plate	
	PFA111	Thread Adapter	
	PFA113	Ceiling Mount	
	PFA114	Thread Adapter	
	PFA120	Junction Box	
	PFA121	Junction Box	
	PFA122	Junction Box	
	PFA122-G	Junction Box	
	PFA123	Junction Box	

	PFA130-E	Junction Box	
	PFA130-E-G	Junction Box	
	PFA130-E-B	Junction Box	
	PFA132	Junction Box	
	PFA134	Junction Box	
	PFA135	Junction Box	
	PFA136	Junction Box	
	PFA137	Junction Box	
	PFA137-B	Junction Box	
	PFA137-G	Junction Box	

Camera Mounting Accessories

	PFA138	Junction Box	
	PFA139	Junction Box	
	PFA139-G	Junction Box	
	PFA13A-E	Junction Box	
	PFA13A-E-B	Junction Box	
	PFA13A-E-G	Junction Box	
	PFA13G	Junction Box	
	PFA140	Power Box	
	PFA140/A	Corrosion Proof Power Box	
	PFA150	Pole Mount	

Camera Mounting Accessories

	PFA151	Corner Mount	
	PFA152-E	Pole Mount	
	PFB203W	Wall Mount	
	PFB203W-G	Wall Mount	
	PFB204G	Wall Mount	
	PFB204W	Wall Mount	
	PFB205W	Wall Mount	
	PFB205W-G	Wall Mount	
	PFB211W	Corrosion Proof Power Box	
	PFB303W	Wall Mount	

21.45'' FHD Monitor
LM22-H200-B4

Suitable for continuous 24/7 operation, Ultra-thin body with metal housing, 6.5ms response time 178°H/178°V extra-wide viewing angle for overall viewing performance, Support multiple signal inputs including HDMI and VGA, built in speakers and screen resolution 1920 x 1080.

32'' FHD Monitor
LM32-F200

Light and cost-effective plastic housing, 178°H/178°V extra-wide viewing angle for overall viewing performance, 8ms response time, Support multiple signal inputs such as HDMI, VGA and USB Built-in speakers. Physical button and infrared remote dual control, screen resolution 1920 x 1080.

43’’ FHD Monitor
LM43-F200

Plastic housing, Suitable for continuous 24/7 operation, 178°H/178°V extra-wide viewing angle, 8ms fast response time, Support multiple signal inputs such as HDMI, VGA and USB, Built-in speakers, Physical button and infrared remote dual control mode, screen resolution 1920 x 1080.

43’’ UHD LED Monitor
LM43-F400

4K Ultra-HD resolution, Suitable for continuous 24/7 operation, 8ms response time, 1.07B colors, for a realistic and immersive visual experience, 178°/178°extra-wide viewing angle for overall viewing performance, screen resolution 3840 x 2160.

NETWORK SWITCHES

Dahua Naming Rule
Network Switches

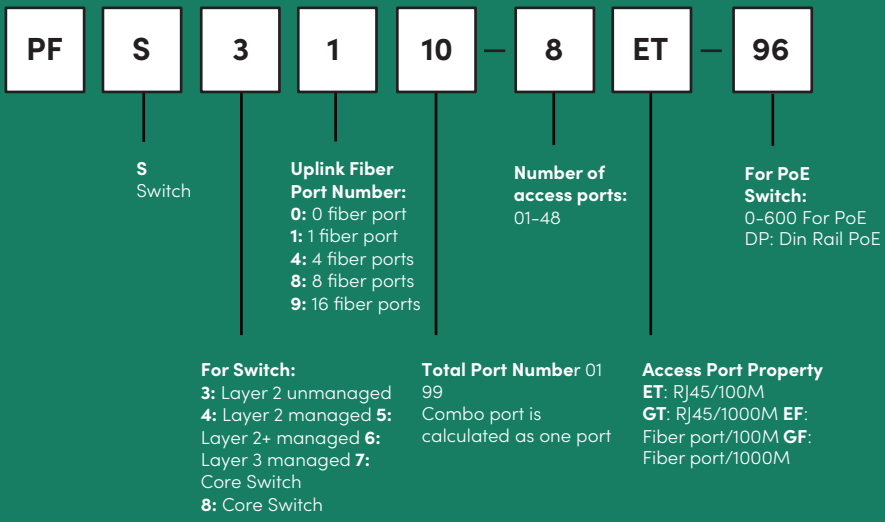

8-Port Unmanaged Gigbitbit Switch
PFS3008-8GT

Supports eight 10/100/1000 Mbps adaptive ports.
Non POE

5-Port Unmanaged Gigbitbit Switch
PFS3005-5GT-L

Supports five 10/100/1000 Mbps adaptive ports.
Non POE

6-Port Fast Ethernet Switch with 4-Port PoE
PFS3006-4ET-36

Support four 10/100M PoE power supply ports, and two 10/100M uplink ports, Support 802.3af and 802.3at standards, OperatingTemperature: -10°C to +55°C, Support 250m long distance PoE tansmission, PoE watchdog.

6-Port 10/100Mbps Unmanaged Desktop Switch with 4 PoE Ports
PFS3006-4ET-60-V2

Support four 10/100M PoE power supply ports, and two 10/100M uplink ports, Support 802.3af and 802.3at standards, Port 1 supports Hi-PoE 60W power supply. OperatingTemperature: -10°C to +55°C, Support 250m long distance PoE tansmission, PoE watchdog.

6-Port Unmanaged Desktop Switch with 4-Port PoE
PFS3006-4GT-60-V2

Intelligent PoE, Hi-PoE 60W (orange port), Long distance PoE, PoE watchdog, All-gigbitbit ports.

10-Port Unmanaged Desktop Switch with 8-Port PoE
PFS3010-8ET-96-V2

Intelligent PoE, 8-pin assignment PoE power supply,Long distance PoE, PoE watchdog

10-Port Gigabit Unswitched Desktop Switch with 8-Port PoE
PFS3010-8GT-96

Support eight 10/100/1000Mbps PoE Ethernet ports, and two 10/100/1000Mbps Ethernet ports, Support 802.3af and 802.3at standards, OperatingTemperature: -10°C to +55°C,

16-Port FE PoE+ 1-Port Gigbitbit Combo PoE Switch
PFS3117-16ET-135

Supports normal working mode, port isolation (VLAN) mode, monitoring mode, network extend mode, Supports Store-and-Forward, 16*10/100Mbps ports, 1*Gigbitbit Combo port, Port 1-2 support the maximum power of 60W, PoE output total power up to 135W.

16-Port 100Mbps + 2-port Gigabit Managed PoE Switch
PFS4218-16ET-240-V3

Intelligent PoE, Red port supports 90W IEEE802.3bt, Web management with friendly interface and easy operation, 250m long distance PoE transmission, PoE watchdog Plug and play.

24-Port 100Mbps + 2-port Gigibit Managed PoE Switch
PFS4226-24ET-360-V3

Intelligent PoE, Red port supports 90W IEEE802.3bt, Web management with friendly interface and easy operation, 250m long distance PoE transmission, PoE watchdog, Plug and play.

24-Port PoE Gigbitbit Managed Switch
PFS4226-24GT-360-V2

Layer 2 network management PoE switch, Support Hi-PoE 60W, Network Redundancy: STP/RSTP/MSTP, Support IPv4/IPv6, and DHCP, Network management based on SNMP.

24-Port L2 Managed Switch
PFS5428-24GT

Hardened L2+ managed aggregation Switch
24GE+4 x GE/10GE SFP+
Switching Capacity: 128Gbps
High lightning protection: Common/Differential mode 4KV/2KV
SFP+ fiber uplink

Our Branches

Fareham branch
Unit 5,
Fulcrum 4
Solent Way, Whiteley
Fareham, Hampshire
PO15 7FT
Tel: 01489 563400

Chelmsford branch
Unit 224,
Waterhouse Business Centre
2 Cromar Way, Chelmsford,
Essex
CM1 2QE
Tel: 01245 860184

Poole branch
Unit 21,
Wessex Trade Centre
Ringwood Road, Poole
Dorset
BH12 3PF
Tel: 01202 745444

St. Albans branch
Unit 8,
Park Industrial Estate
St. Albans,
Hertfordshire
AL2 2DR
Tel: 01727 614441

Dahua Technical Support
Tel: 0333 360 1166